


## 288F SM G 652D MLT Single Sheath Armoured OF Cable (For Underground Duct Application)

Fiber Allocation Scheme		
Tube Colour	Fiber Type	No of Fiber
Blue	SM G 652 D	12
Orange	SM G 652 D	12
Green	SM G 652 D	12
Brown	SM G 652 D	12
Slate	SM G 652 D	12
White	SM G 652 D	12
Red	SM G 652 D	12
Black	SM G 652 D	12
Yellow	SM G 652 D	12
Violet	SM G 652 D	12
Pink	SM G 652 D	12
Aqua	SM G 652 D	12

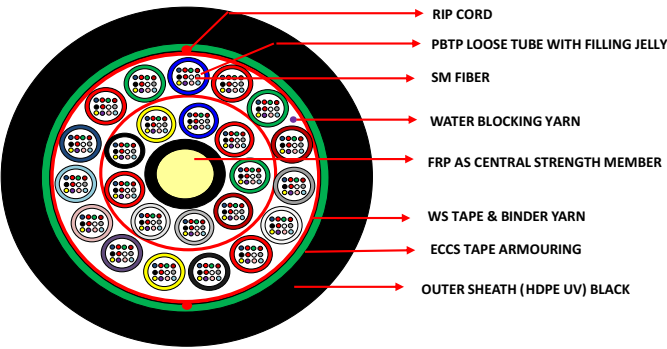

Construction Details	
No of Fibre/Tube	: 12F per Tube - Blue, Orange, Green, Brown, Slate, White, Red, Black, Yellow, Violet, Pink & Aqua
Loose Tube - Layer 1	: PBT Loose Tube Filled With Thixotropic Jelly ( $1.9 \pm 0.1$ mm)
Loose Tube - Layer 2	: PBT Loose Tube Filled With Thixotropic Jelly ( $1.9 \pm 0.1$ mm)
No of Loose Tube - Layer 1	: 09 (Nine) Loose Tube
No of Loose Tube - Layer 2	: 15 (Fifteen) Loose Tube
Tube Identification - Layer 1	: Blue, Orange, Green, Brown, Slate, White, Red, Black & Yellow
Tube Identification - Layer 2	: Blue, Orange, Green, Brown, Slate, White, Red, Black, Yellow, Violet, Pink, Aqua, Blue Strip Marked, Orange Strip Marked & Green Strip Marked
Water Blocking Elements	: Water Swellable Tape & Water Blocking Yarns
Central Strength Member	: Fiber Reinforced Plastic - FRP (Non Metallic) - $3.0 \pm 0.1$ mm Upsheath To $4.0 \pm 0.1$ mm
Moisture Barrier (Protection)	: Water Blocking Yarns & Water Swellable Tape
Core Wrapping	: Water Swellable Tape With Binder Yarn
Armouring	: Corrugated ECCS Tape Applied Over the Core
Core Wrapping	: Core Wrapped With Water Blocking Tape & Binder Yarn
Rip Cord	: Two Rip cord provided Below The Sheath
Outer Sheath	: HDPE UV Black Colour - $1.60$ mm (Nominal)

Fibre Characteristics (As per ITU-T Rec. G. 652 D)			
Attenuation (Transmission Characteristics)		Geometrical Characteristics	
@ 1310 nm	: $\leq 0.36$ (dB/Km)	Mode Field Diameter @ 1310 nm	: $9.2 \pm 0.4$ $\mu$ m
@ 1550 nm	: $\leq 0.23$ (dB/Km)	Mode Field Diameter @ 1550 nm	: $10.4 \pm 0.5$ $\mu$ m
@ 1625 nm	: $\leq 0.26$ (dB/Km)	Cladding Diameter	: $125 \pm 0.7$ $\mu$ m
Dispersion		Cladding Non Circularity	: $\leq 1\%$
A. Total Dispersion (Chromatic Dispersion)		Core Clad Concentricity Error	: $\leq 0.5$ $\mu$ m
1285-1330 nm	: $< 3.5$ ps/nm.km	Coating Diameter	: $245 \pm 10$ $\mu$ m
1270-1340 nm	: $< 5.3$ ps/nm.km	Coating/Cladding Concentricity	: $\leq 12$ $\mu$ m
1550 nm	: $< 18.0$ ps/nm.km	Cut Off Wavelength	
1625 nm	: $< 22.0$ ps/nm.km	Fibre cut-off Wavelength	: $< 1320$ nm
B. Polarization Mode Dispersion at 1310 & 1550 nm		Cable Cut-off Wavelength	: $< 1260$ nm
At Fibre Stage	: $\leq 0.2$ ps/sqrt.km	Mechanical & Operating Characteristics	
At Cable Stage	: $\leq 0.3$ ps/sqrt.km	Operating Temperature	: $-60^{\circ}$ C to $+85^{\circ}$ C
C. Dispersion Slope & Wave Length		Fibre Proof Test	: 1%
Zero Dispersion Wavelength	: 1300-1324 nm	Stripability Force	: $1.3 < F < 8.9$ N
Zero Dispersion Slope	: $\leq 0.092$ ps/nm <sup>2</sup> .km	Fibre Curl	: $\geq 4$ meter radius of curvature

Cable Mechanical & Physical Characteristics			
Cable Mechanical Characteristics		Cable Physical Characteristics	
Max. Tensile Strength (IEC 60794-1-2-E1)	: 9.81 X 2.0 W (Newton)	Cable Diameter (Nominal)	: $17.0$ mm $\pm 0.5$ mm
Crush Resistance (IEC 60794-1-2-E3)	: 2000 N/10 CM x 10 CM	Nominal Cable Weight	: 250 Kg/Km
Impact Resistance (IEC 60794-1-2-E4)	: 50 N/0.5 Meter/10 Impacts	Packing Length	: 2 Km $\pm 5\%$ & (SLG - 5%)
Repeated Bending Test (IEC 60794-1-2-E6)	: 20 X Dia/5 Kg/30 Cycles	Printing Details	: As Per Customer Requirement
Torsion Test (IEC 60794-1-2-E7)	: 2 Mt/100 N/ $\pm 360^{\circ}$ D/10 Cycle	Temp. Cycling Test (IEC 60794 1-2 F1)	: $-20^{\circ}$ - $10^{\circ}$ + $60^{\circ}$ + $70^{\circ}$ Deg C - 12 Hrs
Kink Test (IEC 60794-1-2-E10)	: No Kink - (10 X Bend Radius)	Water Pen. Test (IEC 60794 1-2 F5)	: 1 Meter/3 Meter/24 Hrs
Cable Bend Test (IEC 60794-1-2-E11)	: 20 D/4 Turns/10 Cycles	Drip test (IEC 60794 1-2 E14)	: 30 CM Sample/ $+70^{\circ}$ C/24 Hrs