

Features

8 PORT/ 16 PORT/ 24 PORT / 48 PORT

* Industry Standard User Interface, be made of high-impact plastic.

* Can accommodate PLC splitter / PLC CSplitter Cassettes.

* Anti-UV, Ultra violet resistant, and rainfall resistant.

* Wall and pole mountable.

* IP65 waterproof and dust-proof plastic case

Application


* Widely used in FTTH access network.

* Telecommunication Networks

* CATV Networks

* Data communications Networks

Local Area Networks

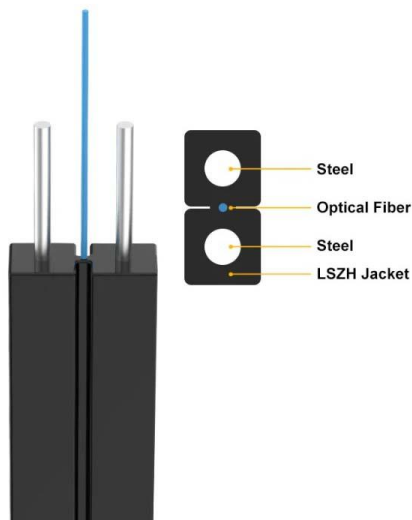

(Product Description)

1. Connector type: SC/ APC/LC
2. Number of cores: single core
3. Mating times: more than 1000 times
4. Insertion loss: Less than 0.2 DV
5. Return loss: less than 50
6. Bending angle: more than 100 degrees
7. Product material: PVC / LSZH phosphating steel wire
8. Cable length: 25m to 300m (Customization Available)