

Splitter And Couplers




FEATURES

- Low Insertion Loss <
- Operating Wavelength 1250nm-1650nm <
- Low PDL <
- Excellent Channel to Channel Uniformity <
- Compact Design. High Reliability and Stability <
- Available in: 12 to 1:64 <
- Available both FBT and PLC Splitter <

APPLICATIONS

- FTTX Networks
- Analog and Digital PON
- CATV Networks
- Video Transmission

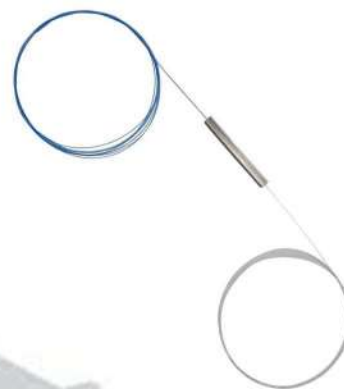

(12)